

Sense Freely
Self-Powered
Wireless-Batteryless
Sustainable Solution for Industry 4.0

WIRELESS DIFFERENTIAL PRESSURE SENSOR



ESCOM Enhanced Solutions


The Future of Wireless - Batteryless Energy Harvesting Sensing Technologies

ESCOM-ES is the R&D center founded in 2018 and owned by ESCOM Power Plants Engineering Services. We are focusing on and developing Self Powered - Wireless - Batteryless Sensors which is eliminating all wiring and cabling cost and workmanship which can reach many kms in a simple industrial plant. And offering smart and green solutions getting rid of batteries and cables...

No Battery - No Cable - No Wiring

ESCOM-ES offers a wide range of domestic and industrial sensing systems that can be used in harsh environment harvests its own power from ambient sources such as motion, temperature, sunlight, magnetic fields, or where energy is available to scavenge...


Self-powered, wireless sensing technology, combined with engineering expertise and rich analytics provide real-time information for our customer's needs...

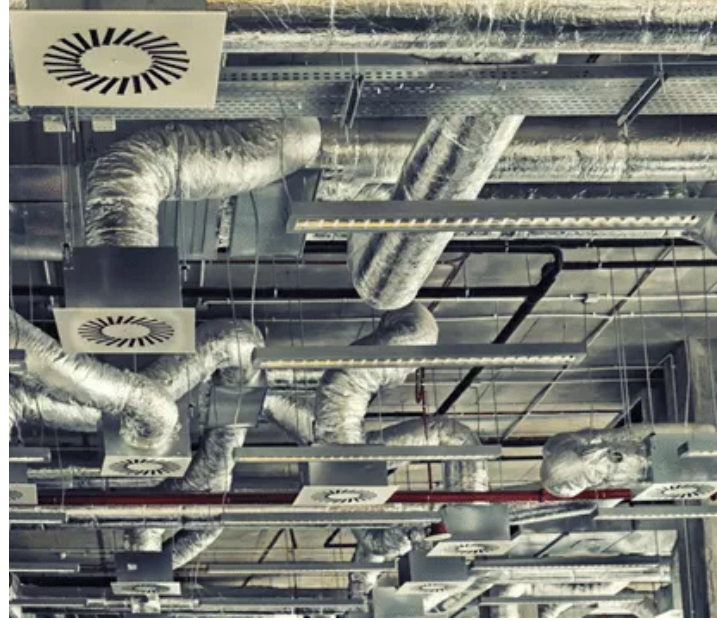

SUSTAINABLE MEASUREMENT TECHNOLOGY

Industry-specific Solutions

Pressure difference is an important parameter for many industries. WiDPr-es low differential pressure sensor is designed to measure dry air and non-corrosive gases across range of general purpose and industrial applications such as HVAC, clean room monitoring, filter monitoring and medical measurement applications.

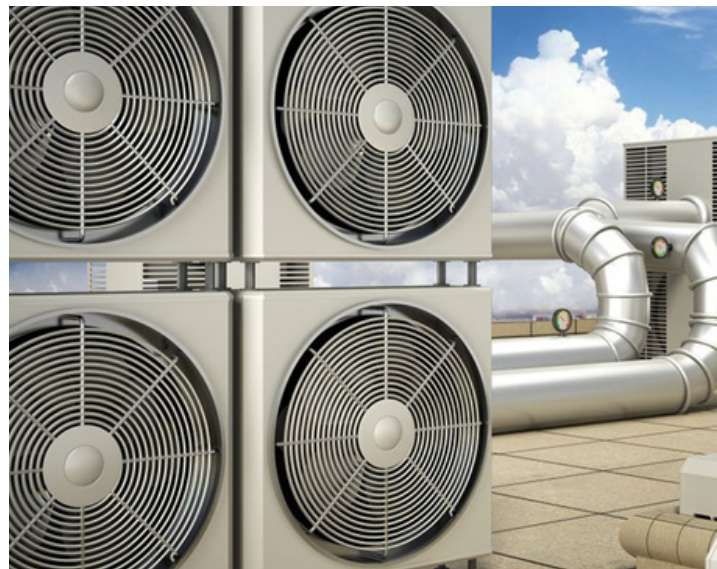

HOW TO GET ENERGY

Harvesting Energy


Harvesting energy is the production of its own energy by using the difference between the temperature of the liquid where the product is located and the temperature of the environment itself. Peltier is used while doing this. Peltier is a component made of ceramic that is hot on one side and cold on the other. This component, which generates energy from the temperature difference, is placed inside the product.

Sensing Point

WiDPr-es has two separate pressure connections so that the difference in pressure between the two connections can be measured. One connection will be marked as High or Positive (+), and the other as Low or Negative (-).

Circuit Box

It is the box where all the electronic embedded circuits and connections of the product are located.

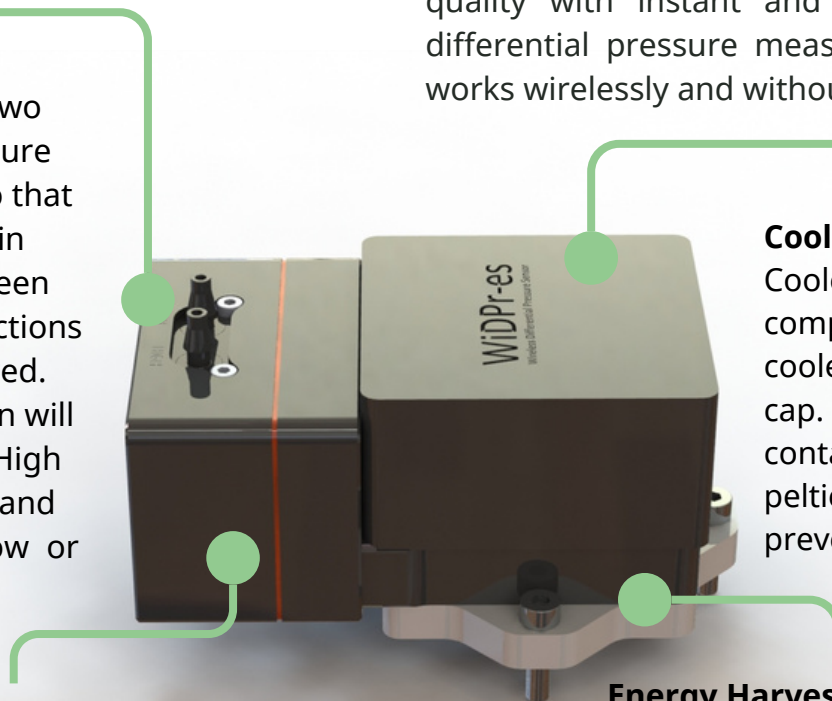

Energy Harvester

A temperature difference is created between the two surfaces and electricity is produced. This is the part that harvests the energy.



PRESSURE MEASUREMENT

Instant and Continuous

Accurate measurement is critical in industrial processes. Reliable and high quality measuring devices are required for these measurements. ESCOM-ES continues its efforts to always be at the top of reliability and quality. WiDPr-es is a product that demonstrates its quality with instant and continuous differential pressure measurement. It works wirelessly and without batteries.

Cooler Case

Cooler case is a component with a cooler and inside a cap. The cooler is in contact with the peltier and is used to prevent overheating.

TECHNICAL SPECIFICATIONS

Sensor Types	Analog Sensor	Digital Sensor
Measuring Ranges	-1,25 ~ +1,25 mbar -1,6 ~ +1,6 mbar -2,5 ~ +2,5 mbar -5 ~ +5 mbar -10 ~ +10 mbar -15 ~ +15 mbar -25 ~ +25 mbar	-40 ~ +40 mbar -60 ~ +60 mbar -160 ~ 160 mbar -250 ~ +250 mbar -400 ~ +400 mbar -600 ~ +600 mbar -1 ~ +1 bar
RF Transmission Power	+8dBm	
Working Temperature	-20°C...+85°C	
Sampling Refresh Rate	10s	
Data Transmission Protocol	BLE	
Power Consumption	30 μ W	

Innovative Energy Harvesting for the Enhanced Industrial Sensing Solutions

Our innovative energy harvesting, *ultra low power consumption*, and wireless data transmission technologies are paving the way for a smarter, more connected future. Explore our cutting-edge solutions and revolutionize the way you collect and process data in your industrial systems



Order Code

Coding System

W D P - A P 0 2 5 A 1 - T C

PRESSURE TYPE

A - Analog
D - Digital

MEASURING RANGE

P00125(-1,25 ~ +1,25 mbar)
P0016(-1,6 ~ +1,6 mbar)
P0025(-2,5 ~ +2,5 mbar)
P005(-5 ~ +5 mbar)
P010(-10 ~ +10 mbar)
P015(-15 ~ +15 mbar)
P025(-25 ~ +25 mbar)
P040(-40 ~ +40 mbar)
P060(-60 ~ +60 mbar)
P160(-160 ~ 160 mbar)
P250(-250 ~ +250 mbar)
P400(-400 ~ +400 mbar)
P600(-600 ~ +600 mbar)
P1000(-1 ~ +1 bar)

ACCURACY

A- ($\leq \pm 0.5\%$)
B- ($\leq \pm 1\%$)
C- ($\leq \pm 1.5\%$)
D- ($\leq \pm 3\%$)

CHARGING OPTION

N- Non-Charging
C- WirelessCharging

CONNECTION


T: Tube Conneciton
M: Manifold Connection

MAXIMUM MEDIA TEMPERATURE

1- 50 °C
2- 85 °C

INDUSTRIAL IoT

Wireless BatteryLess Sensors & Network

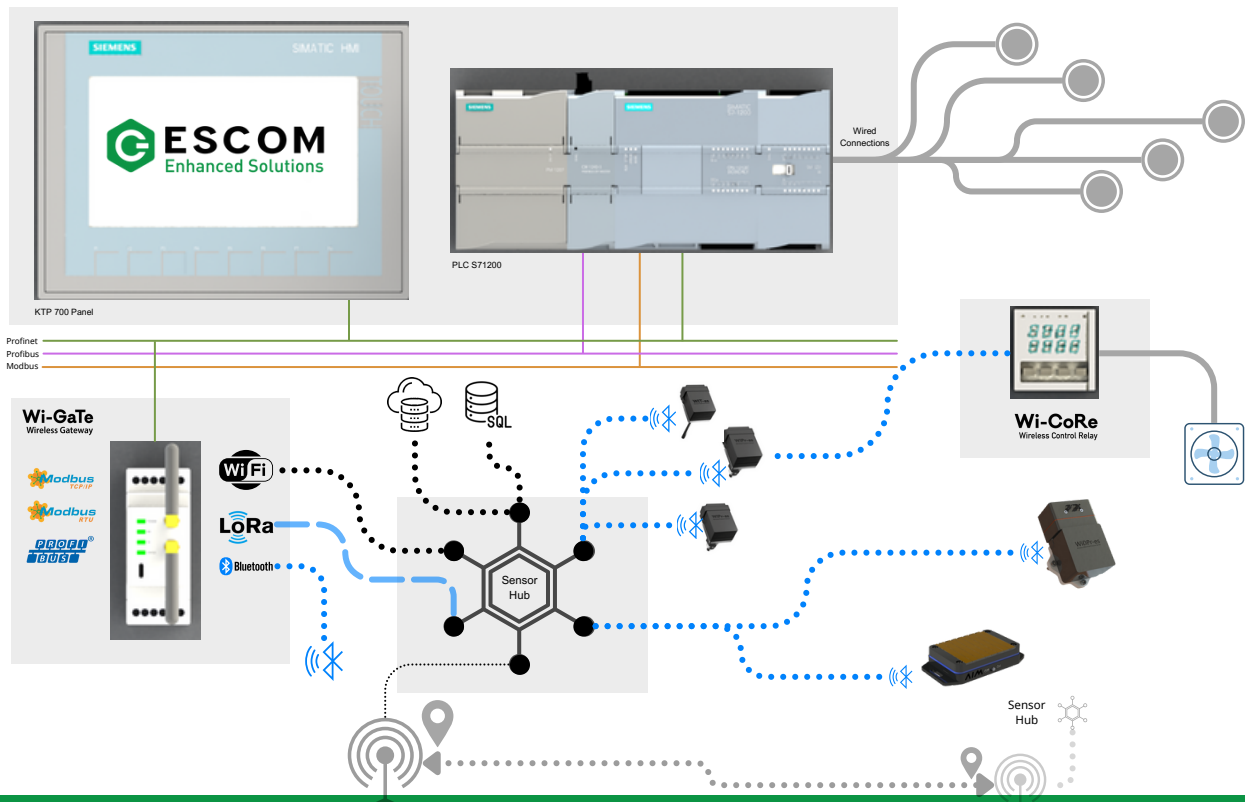

COMPLEMENTARY EQUIPMENTS For Wireless Control Systems

- Temperature
- Wireless Charging



Wi-CaM

Wireless Charging and Monitoring

Wi-CaM is a versatile wireless charging and monitoring solution for self-powered sensors like WiT-es and WiPr-es. It enables efficient initial commissioning and energy harvesting when fluid temperature is insufficient, charges the sensor in just 2 seconds, and offers real-time monitoring.

- Wireless Gateway



Wi-GaTe

Wireless Gateway

Wi-GaTe is a wireless gateway for WiT-es and WiPr-es sensors, transmitting data to PLC and SCADA systems. It supports RS485, Modbus, Profibus, Profinet, Wi-Fi, and BLE communication, with a 30dBm transmission power and capacity for 128 MAC addresses, offering a reliable and scalable solution for wireless sensing applications.

- Wireless Control



Wi-CoRe

Wireless Control Relay

Wi-CoRe is a wireless control relay designed to work with WiT-es sensors, switching according to the received temperature information. It features adjustable upper and lower limits for set and alarm values, a minimum 500ms sampling time, a 220V supply voltage, a 0-20mA output, and two NO/NC relay outputs (10A).



✉ info@escom-es.com

📍 Fertek Mah. OSB 7.cad No:16/1 51100 Nigde TURKIYE

🌐 www.escom-es.com

